


POZIDRIV® INDENTED HEXAGON PINS

STANDARD INDENTED POZIDRIV® HEXAGON PINS

SCREW SIZE	HEX SIZE A/F	PIN NUMBER	A/F	B	C	D	E	L	OPTIONAL L	PUNCH PEN.
			+0.000 -0.001	+0.005 -0.000	+0.003 -0.000	+0.000 -0.001	+0.015 -0.000	WTP STD		+0.000 -0.006
6	1/4	3RPZ 20-100 520	0.242	0.208	0.017	0.311	0.562	1.250	2.500	0.087
8	1/4	3RPZ 20-102 520	0.242	0.208	0.017	0.311	0.562	1.250	2.500	0.106
10	5/16	3RPZ 20-103 620	0.302	0.258	0.027	0.374	0.562	1.250	2.500	0.125
1/4	3/8	3RPZ 30-71 820	0.364	0.314	0.034	0.499	0.625	1.250	2.500	0.180
1/4	7/16	3RPZ 30-87 820	0.425	0.360	0.037	0.499	0.625	1.250	2.562	0.183

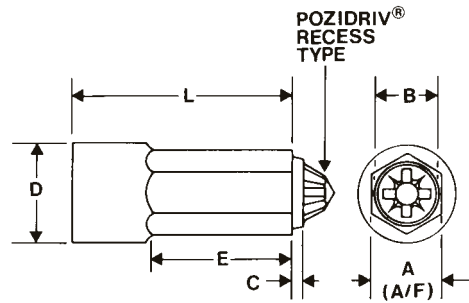

NOTE: Please specify length of pin when ordering.

WARNING

Any heading punch may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.